



Stormwater Treatment – Vortech Treatment Units



CONTECH[®]
ENGINEERED SOLUTIONS

CDS[®]



Solutions
Guide




Continuous Deflective Separation - CDS®



Superior Stormwater Trash and Sediment Removal

The CDS is a swirl concentrator hybrid technology that uses continuous deflective separation – a combination of swirl concentration and indirect screening to screen, separate and trap debris, sediment, and hydrocarbons from stormwater runoff. The indirect screening capability of the system allows for 100% removal of floatables and neutrally buoyant material debris 2.4 mm or larger, without binding. CDS retains all captured pollutants, even at high flow rates, and provides easy access for maintenance.

CDS is used to meet trash Total Maximum Daily Load (TMDL) requirements, for stormwater quality control, inlet and outlet pollution control, and as pretreatment for filtration, detention/infiltration, bioretention, rainwater harvesting systems, and a variety of green infrastructure practices.

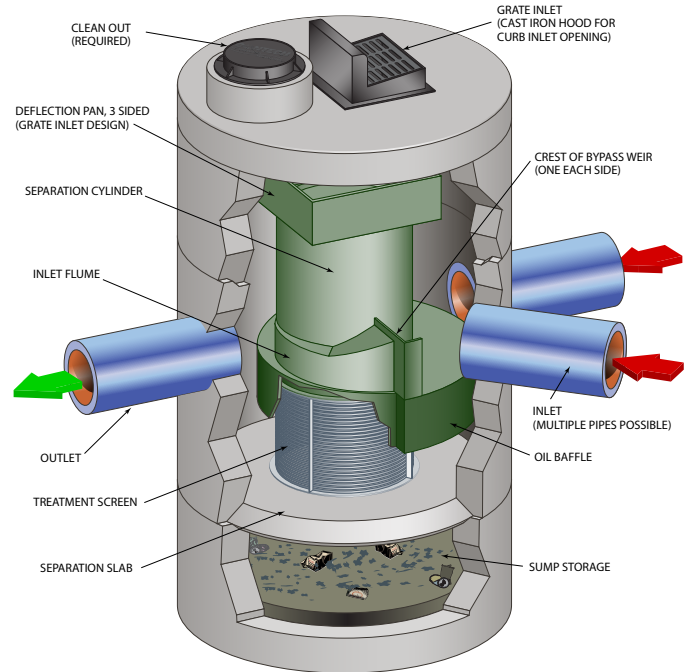

Learn more about the CDS system at www.ContechES.com/CDS ❖ ❖ ❖

CDS® Approvals

CDS has been verified by some of the most stringent stormwater technology evaluation organizations in North America, including:

- Washington State Department of Ecology
- New Jersey Department of Environmental Protection
- Canadian Environmental Technology Verification (ETV)
- California Statewide Trash Amendments Full Capture System Certified*



* The CDS System has been certified by the California State Water Resources Control Board as a Full Capture System provided that it is sized to treat the peak flow rate from the region specific 1-year, 1-hour design storm, or the peak flow capacity of the corresponding storm drain, whichever is less.

CDS® Features & Benefits

Feature	Benefit
1. Captures and retains 100% of floatables and neutrally buoyant debris 2.4 mm or larger	1. Superior pollutant removal
2. Self-cleaning screen	2. Ease of maintenance
3. Isolated storage sump eliminates scour potential	3. Excellent pollutant retention
4. Internal bypass	4. Eliminates the need for additional structures
5. Multiple pipe inlets and 90-180° angles	5. Design flexibility
6. Numerous regulatory approvals	6. Proven performance

The CDS® Screen

Traditional approaches to trash control typically involve “direct screening” that can easily become clogged, as trash is pinned to the screen as water passes through. Clogged screens can lead to flooding as water backs up.

The design of the CDS screen is fundamentally different. Flow is introduced to the screen face which is louvered so that it is smooth in the downstream direction. The effect created is called “Continuous Deflective Separation.” The power of the incoming flow is harnessed to continually shear debris off the screen and to direct trash and sediment toward the center of the separation cylinder.


Key Features:

Self-Cleaning Screening Technology


- CDS Screen captures neutrally buoyant materials missed by other separator systems.
- Screen is hydraulically designed to be self-cleaning.
- Runoff entering the separation cylinder must pass through the screen prior to discharge, eliminating potential for scouring previously captured trash at high flow rates.



The CDS Screen — Self-Cleaning Screening Technology ❖ ❖ ❖

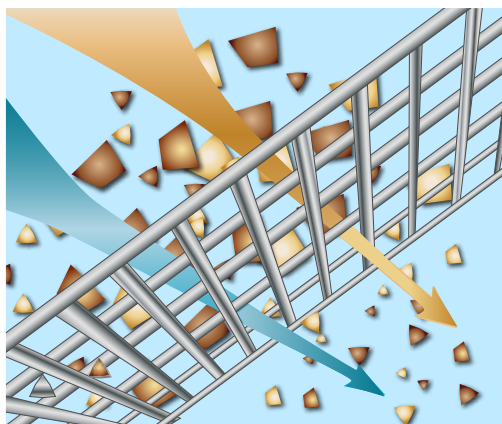

Direct Screening – particles that are larger than the aperture size of the screen can cause clogging, resulting in flooding if not maintained frequently.

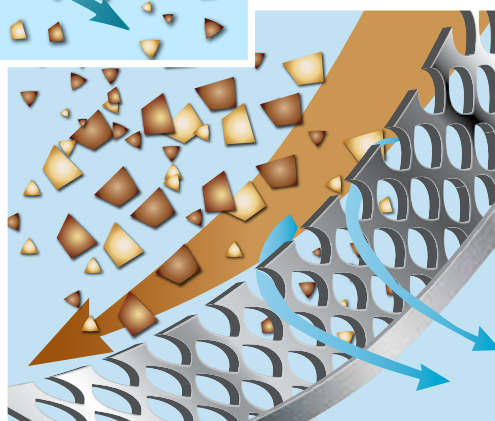


Continuous Deflective Separation Indirect Screening – water velocities within the swirl chamber continually shear debris off the screen to keep it clean.

CDS® Configuration - One System that Can Do It All!

The CDS effectively treats stormwater runoff while reducing the number of structures on your site.


WHY GO THROUGH ALL THIS?

TRADITIONAL STORMWATER TREATMENT SITE DESIGN

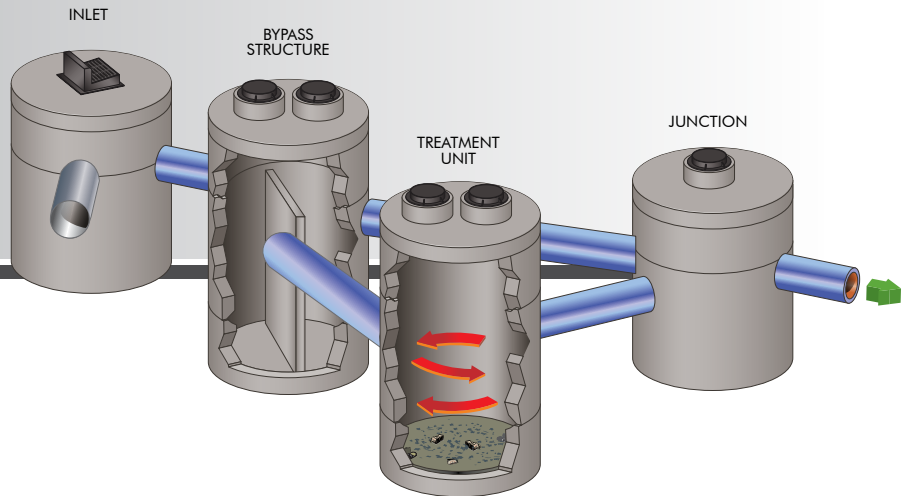

ONE SYSTEM CAN DO IT ALL!

- Inline, offline, grate inlet, and drop inlet configurations available
- Internal and external peak bypass options available

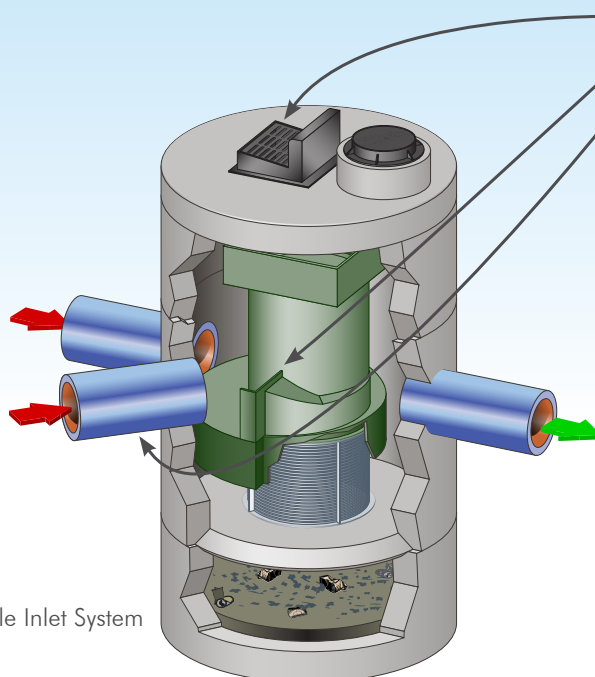

CDS® Multiple Inlet System



Save Time, Space, and Money with CDS®

- Grate inlet option available
- Internal bypass weir
- Accepts multiple inlets at a variety of angles
- Advanced hydrodynamic separator
- Captures and retains 100% of floatables and neutrally buoyant debris 2.4 mm or larger
- Indirect screening capability keeps screen from clogging
- Retention of all captured pollutants, even at high flows
- Performance verified by NJCAT, WA Ecology, and ETV Canada

CDS® Applications

CDS is commonly used in the following stormwater applications:

- Stormwater quality control – trash, debris, sediment, and hydrocarbon removal
- Urban retrofit and redevelopment
- Inlet and outlet protection
- Pretreatment for filtration, detention/infiltration, bioretention, rainwater harvesting systems, and Low Impact Development designs.



CDS provides trash control.



CDS pretreats a bioswale.



CDS pretreats a rainwater harvesting cistern.



CDS standalone system removes trash and sediment.

CDS® Models and Capacities

CDS MODEL	Treatment Flow Rates ¹			Estimated Maximum Peak Conveyance Flow ³ (cfs)/(L/s)	Minimum Sump Storage Capacity ⁴ (yd ³)/(m ³)	Minimum Oil Storage Capacity ⁴ (gal)/(L)	
	75 microns (cfs)/(L/s)	125 microns ² (cfs)/(L/s)	Trash & Debris (cfs)/(L/s)				
PRECAST	CDS2015-4	0.5 (14.2)	0.7 (19.8)	1.0 (28.3)	10 (283)	0.9 (0.7)	61 (232)
	CDS2015-5	0.5 (14.2)	0.7(19.8)	1.0 (28.3)	10 (283)	1.5 (1.1)	83 (313)
	CDS2020-5	0.7 (19.8)	1.1 (31.2)	1.5 (42.5)	14 (396)	1.5 (1.1)	99 (376)
	CDS2025-5	1.1 (31.2)	1.6 (45.3)	2.2 (62.3)	14 (396)	1.5 (1.1)	116 (439)
	CDS3020-6	1.4 (39.6)	2.0 (56.6)	2.8 (79.3)	20 (566)	2.1 (1.6)	184 (696)
	CDS3025-6	1.7 (48.1)	2.5 (70.8)	3.5 (99.2)	20 (566)	2.1 (1.6)	210 (795)
	CDS3030-6	2.0 (56.6)	3.0 (85.0)	4.2 (118.9)	20 (566)	2.1 (1.6)	236 (895)
	CDS3035-6	2.6 (73.6)	3.8 (106.2)	5.3 (150.0)	20 (566)	2.1 (1.6)	263 (994)
	CDS4030-8	3.1 (87.7)	4.5 (127.4)	6.3 (178.3)	30 (850)	5.6 (4.3)	426 (1612)
	CDS4040-8	4.1 (116.1)	6.0 (169.9)	8.4 (237.8)	30 (850)	5.6 (4.3)	520 (1970)
	CDS4045-8	5.1 (144.4)	7.5 (212.4)	10.5 (297.2)	30 (850)	5.6 (4.3)	568 (2149)
	CDS5640-10	6.1 (172.7)	9.0 (254.9)	12.6 (356.7)	50 (1416)	8.7 (6.7)	758 (2869)
	CDS5653-10	9.5 (268.9)	14.0 (396.5)	19.6 (554.8)	50 (1416)	8.7 (6.7)	965 (3652)
	CDS5668-10	12.9 (365.1)	19.0 (538.1)	26.6 (752.9)	50 (1416)	8.7 (6.7)	1172 (4435)
	CDS5678-10	17.0 (481.2)	25.0 (708.0)	35.0 (990.7)	50 (1416)	8.7 (6.7)	1309 (4956)
CAST-IN-PLACE	CDS9280-12	27.2 (770.2)	40.0 (1132.7)	56.0 (1585.7)	Offline	16.8 (12.8)	N/A
	CDS9290-12	35.4 (1002.4)	52.0 (1472.5)	72 (2038.8)		16.8 (12.8)	
	CDS92100-12	42.8 (1212.0)	63.0 (1783.9)	88 (2491.9)		16.8 (12.8)	
	CDS150134-22	100.7 (2851.5)	148.0 (4190.9)	270 (7645.6)		56.3 (43.0)	
	CDS200164-26	183.6 (5199.0)	270.0 (7645.6)	378.0 (10703.8)		78.7 (60.2)	
	CDS240160-32	204 (5776.6)	300.0 (8495.1)	420.0 (11893.0)		119.1 (91.1)	
	Additional Cast-in-Place models available upon request.						

1. Alternative PSD/D₅₀ sizing is available upon request.
2. 125 micron flows are based on the CDS Washington State Department of Ecology approval for 80% removal of a particle size distribution (PSD) having a mean particle size (D₅₀) of 125 microns.
3. Estimated maximum peak conveyance flow is calculated using conservative values and may be exceeded on sites with lower inflow velocities and sufficient head over the weir.
4. Sump and oil capacities can be customized to meet site needs.

CDS® Maintenance

Systems vary in their maintenance needs, and the selection of a cost-effective and easy-to-access treatment system can mean a huge difference in maintenance expenses for years to come.

A CDS unit is designed to minimize maintenance and make it as easy and inexpensive as possible to keep our systems working properly.

Inspection

Inspection is the key to effective maintenance. Pollutant deposition and transport may vary from year to year and site to site. Semi-annual inspections will help ensure that the system is cleaned out at the appropriate time. Inspections should be performed more frequently where site conditions may cause rapid accumulation of pollutants.



Most CDS units can easily be cleaned in 30 minutes.

Recommendations for CDS Maintenance

The recommended cleanout of solids within the CDS unit's sump should occur at 75% of the sump capacity. Access to the CDS unit is typically achieved through two manhole access covers – one allows inspection and cleanout of the separation chamber and sump, and another allows inspection and cleanout of sediment captured and retained behind the screen. A vacuum truck is recommended for cleanout of the CDS unit and can be easily accomplished in less than 30 minutes for most installations.

DYOHDS™ Tool Design Your Own Hydrodynamic Separator

Features

- Choose from three HDS technologies - CDS®, Vortechs® and VortSentry® HS
- Site specific questions ensure the selected unit will comply with site constraints
- Unit size based on selected mean particle size and targeted removal percentage
- Localized rainfall data allows for region specific designs
- PDF report includes detailed performance calculations, specification and standard drawing for the unit that was sized



 **DYO Project**
design made easy.



↑ Design Your Own (DYO) Hydrodynamic Separator
online at www.ContechES.com/dyohds



Next Steps

Learn more

See our CDS systems in action at www.ContechES.com/videos

Connect with Us

We're here to make your job easier – and that includes being able to get in touch with us when you need to. www.ContechES.com/localresources

Start a Project

If you are ready to begin a project, visit us at www.ContechES.com/startaproject




Contech Engineered Solutions LLC provides site solutions for the civil engineering industry. Contech's portfolio includes bridges, drainage, retaining walls, sanitary sewer, stormwater, erosion control and soil stabilization products.

The product(s) described may be protected by one or more of the following US patents: 5,322,629; 5,624,576; 5,707,527; 5,759,415; 5,788,848; 5,985,157; 6,027,639; 6,350,374; 6,406,218; 6,641,720; 6,511,595; 6,649,048; 6,991,114; 6,998,038; 7,186,058; 7,296,692; 7,297,266 related foreign patents or other patents pending.

CDS is a registered trademark or licensed trademark of Contech Engineered Solutions LLC.



COMPLETE SITE SOLUTIONS



Stormwater Solutions

Helping to satisfy stormwater management requirements on land development projects

- Stormwater Treatment
- Detention/Infiltration
- Rainwater Harvesting
- Biofiltration/Bioretenation

Pipe Solutions

Meeting project needs for durability, hydraulics, corrosion resistance, and stiffness

- Corrugated Metal Pipe (CMP)
- Steel Reinforced Polyethylene (SRPE)
- High Density Polyethylene (HDPE)
- Polyvinyl Chloride (PVC)

Structures Solutions

Providing innovative options and support for crossings, culverts, and bridges

- Plate, Precast & Truss bridges
- Hard Armor
- Retaining Walls
- Tunnel Liner Plate

NOTHING IN THIS CATALOG SHOULD BE CONSTRUED AS A WARRANTY. APPLICATIONS SUGGESTED HEREIN ARE DESCRIBED ONLY TO HELP READERS MAKE THEIR OWN EVALUATIONS AND DECISIONS, AND ARE NEITHER GUARANTEES NOR WARRANTIES OF SUITABILITY FOR ANY APPLICATION. CONTECH MAKES NO WARRANTY WHATSOEVER, EXPRESS OR IMPLIED, RELATED TO THE APPLICATIONS, MATERIALS, COATINGS, OR PRODUCTS DISCUSSED HEREIN. ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND ALL IMPLIED WARRANTIES OF FITNESS FOR ANY PARTICULAR PURPOSE ARE DISCLAIMED BY CONTECH. SEE CONTECH'S CONDITIONS OF SALE (AVAILABLE AT WWW.CONTECHES.COM/COS) FOR MORE INFORMATION.

Get Social With Us!



©2018 Contech Engineered Solutions LLC, a QUIKRETE Company
800-338-1122 | www.ContechES.com
All Rights Reserved. Printed in the USA.